





Clover 4 Renewable Energy Solutions

Portable solar system

Basic Info:

Model NO.	CRG/SA-1000W
Solar Power	1000W
Solar Panel	200W 18V
Output Voltage	110V/220V/ and 12V
Battery	Build in 120ah 12V Lead Acid
Inverter	Build in 1000W Pure Sine Wave Inverter
Controller	Build in 20A Solar Controller
Home Application	Lights, Phone, TV, Computer, Washing Machine, R

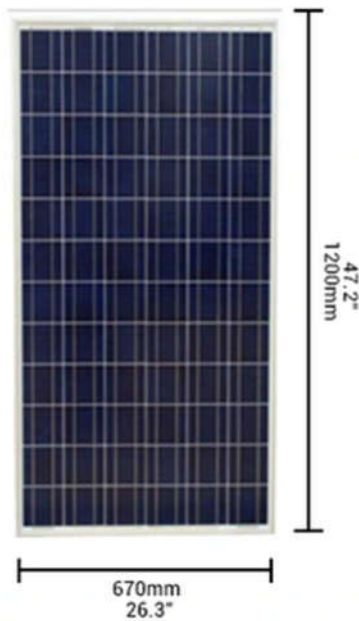

Model	CRG/SA-1000-1	CRG/SA-1000-2	CRG/SA-1000-3
Inverter	1000W	1000W	1000W
Input			
Voltage 1	AC220V/50Hz		
Voltage 2 (From Solar Panel)	18V		
Output			
AC Voltage	AC220V		
Output Wave	Pure Sine Wave		
DC Voltage	DC5V x 2, DC12Vx6		
Display			
LED/LCD	4 Battery Level LED Indicators/Digital LED Display		
Built In Battery			
Battery Type	Lead Acid battery		
Battery Voltage	12V		
Battery Capacity	80AH	100AH	120AH
Over Voltage Protection	14.8V		
Built-In Solar Controller & Charger			
Solar Controller Type	PWM		
Max Solar Charger Current	10A	20A	20A
Solar Panel with Cable			
Solar Panel Type	Poly Solar Panel		
Power Panel Power	120W/18V	140W/18V	200W/18V
Dimension, D x W x H(mm)	1200*670*30	1480*670*35	1320*992*35
Weight(Kg)	11.5	13	20

PT Vistana Insinyur Servis Co. reg. no (NPWP): 03.297.743.1-215.000

Sakura Garden Block AA no 7 Kampung Seraya Batu Ampar

Batam Kepri Indonesia 29454 vistanainsinyurservis@gmail.com

Physical			
Shell Material	Iron		
Dimension, D x W x H(mm)	590*255*488	590*255*488	590*255*488
Weight(Kg)	46.5	52.5	57
Accessories			
	5W LED bulb*2	5W LED bulb*2	5W LED bulb*2
	E27holder+switch+5m cable 0.2MM ² *2	E27holder+switch+5m cable 0.2MM ² *2	E27holder+switch+5m cable 0.2MM ² *2
	1-4USB cable	1-4USB cable	1-4USB cable
Operating Environment			
Humidity	5% to 95% Relative Humidity(Non-Condensing)		
Operating Temperature	0°C-55°C		
Storage Temperature	(-)10°C-60°C		

Applications:

1. Office equipment series: Computers, Printers, Copiers, Scanners, digital camera, etc.
2. Household appliances series: Vacuum cleaners, Fans, Lighting, Electric cutting knife, Television, Sewing machines, Electric fans, AC, etc.
3. Kitchen utensils series: Microwave ovens, Refrigerators, Freezers, Coffee machines, Blenders, Oven, induction cooker, etc.
4. Electronics Series: TV, VCR, Game consoles, Radios, Power amplifiers, Audio equipment, Monitoring equipment, Terminal equipment,
5. Intelligence platforms, Satellite communications equipment.
6. In-car or on-boat devices series: Military vehicle, police cars, medical ambulance, ships, traffic lights, and etc.